

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : F16C 13/00, D21G 1/02, D21F 3/08 // G01M 1/34	A1	(11) International Publication Number: WO 00/58638 (43) International Publication Date: 5 October 2000 (05.10.00)
(21) International Application Number: PCT/FI00/00265 (22) International Filing Date: 29 March 2000 (29.03.00) (30) Priority Data: 990702 30 March 1999 (30.03.99) FI (71) Applicant (for all designated States except US): VALMET CORPORATION <i>METSÄ PAPER, INC.</i> [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): SAVOLAINEN, Eero [FI/FI]; Pyssymiehenkatu 28, FIN-40470 Jyväskylä (FI). SNELLMAN, Jorma [FI/FI]; Tupakatu 3, FIN-40500 Jyväskylä (FI). (74) Agent: FORSSEN & SALOMAA OY; Yrjönkatu 30, FIN-00100 Helsinki (FI).		(81) Designated States: AE, AG, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, DZ, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Finnish).</i>
(54) Title: METHOD FOR PRODUCING A ROLL OF A PAPER/BOARDMAKING MACHINE AND ROLL OF A PAPER/BOARDMAKING MACHINE (57) Abstract <p>The invention relates to a method for producing a roll for a paper or board machine. In the method, a tubular roll blank is made by bending out of a planar sheet or by means of centrifugal casting. The roll blank is first coated with a material having a modulus of elasticity and a density lower than those of steel and the coated roll blank is turned on a lathe to a desired shape and to a desired surface quality.</p> <div data-bbox="665 1239 1364 1869"></div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire -	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD FOR PRODUCING A ROLL OF A PAPER/BOARDMAKING MACHINE AND ROLL OF A PAPER/BOARDMAKING MACHINE

5

The invention relates to a method according to the preamble of claim 1.

The invention also relates to a roll according to the preamble of claim 5.

10

As known from the prior art, some of the rolls in papermaking machines are made out of shell blanks by bending sheets, then after bending of the sheets the outer surface of the shell is turned on a lathe, in which connection the errors in shape caused by manufacturing inaccuracies are passed to variations in wall thickness, wherefore there arise variations in the stiffness of the shell and eccentricity of the centre of gravity of the shell with respect to its centre of rotation. The unbalance caused by the eccentricity of the centre of gravity may be minimized in the blank by proper centring and by balancing of the shell, but it is difficult to correct the stiffness variations later on. Turning causes errors in the roundness and straightness of the roll also because the blank has residual stresses and/or because the thickness of chips during machining varies. The variation of roll stiffness produces so-called semicritical vibration at a speed which is half of the critical speed of the roll. Unbalance in turn causes vibrations at all speeds.

It is an object of the invention to propose a solution to the above-mentioned problems.

25

With a view to achieving the above-noted objectives and those that will come out later, the method according to the invention is principally characterized in what is stated in the characterizing part of claim 1.

30 The roll of a paper machine according to the invention is in turn principally characterized in what is stated in the characterizing part of claim 5.

In accordance with the invention, the variation of the stiffness of the shell and its need for balancing are substantially reduced because the shell body is not turned on a lathe, but, instead, after a roll blank has been produced out of a sheet by bending, the shell is first covered by a coating and turned only after this. In that connection, the errors in shape are passed to the coating as thickness variation and, as the modulus of elasticity and the density of the coating are lower than those of steel, both the variation of the stiffness and the unbalance of the shell are substantially reduced. As the coating is used, for example, in a dryer section a material that withstands high-temperature conditions. The coating is selected such as to have a low stiffness and a low density, i.e. the density and the modulus of elasticity are low. The invention can be applied to roll blanks made of planar sheets by bending as well as in connection with centrifugally cast rolls.

In accordance with the invention, the thickness of the wall is measured and its shape is determined accordingly such that the difference in stiffness is as low as possible.

The coating can be applied to the surface of the roll by rotational casting or by vulcanizing, after which the roll is machined to a desired shape and to a desired surface quality.

The invention is most suitable for use in connection with guide rolls and nip rolls having a low nip load, such as, for example, a reeling drum.

By means of the invention, improved quality and cost savings are achieved.

In the following, the invention is described in greater detail, and the benefits of the invention are also described with reference to the accompanying drawings, to the details of which the invention is, however, by no means intended to be narrowly confined.

Figures 1A and 1B show a schematic comparison of differences in stiffness of a roll according to the invention and a roll produced by turning.

Figures 2A and 2B show a schematic comparison relating to the eccentricity of the centre of gravity when using a roll according to the invention as compared with a roll produced by turning.

- 5 Figures 3A and 3B show a schematic comparison of the principal inertias of a roll made according to the invention and a roll produced by turning.

In accordance with the invention, a roll shell is bent out of a sheet blank into tubular form and its longitudinal seam is welded, and after that the shape of the tubular roll blank is
10 measured and corrected, when needed, such that the difference in stiffness is as small as possible. After that, the roll is coated by providing, for example, by rotational casting or vulcanizing, the surface of the roll with a coating the density and the modulus of elasticity of which are considerably lower than the corresponding values of steel. The coating is machined to a desired shape and to a desired surface quality, after which the roll is ready
15 for use and its stiffness difference and eccentricity of the centre of gravity are substantially smaller than those of a roll produced by means of known methods, as will be clear from the following series of figures and, moreover, the difference in principal inertias as a function of the diameter and the wall thickness of the roll is small.

- 20 The modulus of elasticity of the coating is 10 - 5000 MPa, preferably 10 - 4000 MPa, and its density is 0.9 - 3 g/cm³, preferably 0.9 - 1.5 g/cm³. The coating material is, for example, polyurethane, ebonite or an epoxy composite.

Figs. 1A and 1B show a comparison of the differences in stiffness of a roll produced in
25 accordance with the invention and a roll produced by turning when the out-of-roundness of the blank is 1 mm. Fig. 1A shows a roll produced according to the invention, wherein ΔI is 0.2 %, ΔI is $I_1 - I_2 / I_2 \cdot 100$ %, and I_2 is on the horizontal axis and I_1 is on the vertical axis. In the case shown in Fig. 1B, ΔI is 0.61 %. In the comparison, the diameter of the roll was 800 mm and the thickness of the wall was 35 mm. As seen in the figures, the
30 difference in stiffness ΔI of the roll produced according to the invention is clearly smaller.

Figs. 2A and 2B show a comparison concerning the eccentricity of the centre of gravity when using the method according to the invention and a roll produced according to it or when using a roll made by turning, as known in prior art. In Fig. 2A, the eccentricity E of the centre of gravity = 0.21 mm and, in Fig. 2B, the eccentricity E of the centre of gravity = 4.83 mm. In the comparison used, the outside diameter D_u of the roll = 810 mm, the inside diameter D of the roll = 800 mm, the thickness s of the wall of the roll = 35 mm, and the eccentricity e of the blank = 1.0 mm. As seen in the figures, the eccentricity of the centre of gravity of the roll according to the invention is clearly smaller.

10 Figs. 3A and 3B schematically show the difference of principal inertias as a function of the diameter and the wall thickness of the roll when the out-of-roundness of the inside bore is 1 mm and the difference in per cent (%) of the principal inertias is on the Y-axis, the diameter of the roll in millimetres (mm) is on the horizontal axis and the thickness of the wall of the roll in millimetres (mm) is on the Z-axis. Fig. 3A shows the values for a roll produced according to the invention and Fig. 3B shows the values for a roll made by turning it on the outside as known in prior art. Considerably smaller differences are attained for the roll according to the invention.

As is evident from the series of figures described above, the technique according to the invention provides substantial advantages in the balance and stiffness asymmetry of the roll over the prior art arrangements.

Above, the invention has been described only with reference to some of its preferred embodiments, to the details of which the invention is, however, not by any means intended to be narrowly confined.

Claims

1. A method for producing a roll for a paper or board machine, in which method a tubular roll blank is made by bending out of a planar sheet or by means of centrifugal casting,
5 **characterized** in that the roll blank is first coated with a material that has a modulus of elasticity and a density lower than those of steel, and that the coated roll blank is turned to a desired shape and to a desired surface quality.
2. A method according to claim 1, **characterized** in that, in the method, the wall
10 thickness of the roll blank is measured during the rotation of the roll blank in order to determine the shape of the outer surface, the differences in stiffness are calculated and the shape required for balancing is determined, after which the roll blank is coated and machined.
- 15 3. A method according to claim 1 or 2, **characterized** in that the roll blank is coated by rotational casting or by vulcanizing.
4. A method according to any one of claims 1 to 3, **characterized** in that, in the method, the variation in the wall thickness of the body shell is compensated for by means of the
20 shape of the blank and the final balancing is provided by means of the coating.
5. A roll for a paper or board machine, which is made into a tubular roll blank by bending out of a planar sheet or by means of centrifugal casting, **characterized** in that the roll blank is coated with a material that has a modulus of elasticity and a density lower than
25 those of steel before the roll blank is turned on a lathe into a roll.
6. A roll according to claim 5, **characterized** in that the coating is polyurethane, ebonite or an epoxy composite.
- 30 7. A roll according to claim 5 or 6, **characterized** in that the modulus of elasticity of the coating is 10 - 4000 MPa.

8. A roll according to any one of claims 5 to 7, **characterized** in that the density of the coating is 0.9 - 1.5 g/cm³.

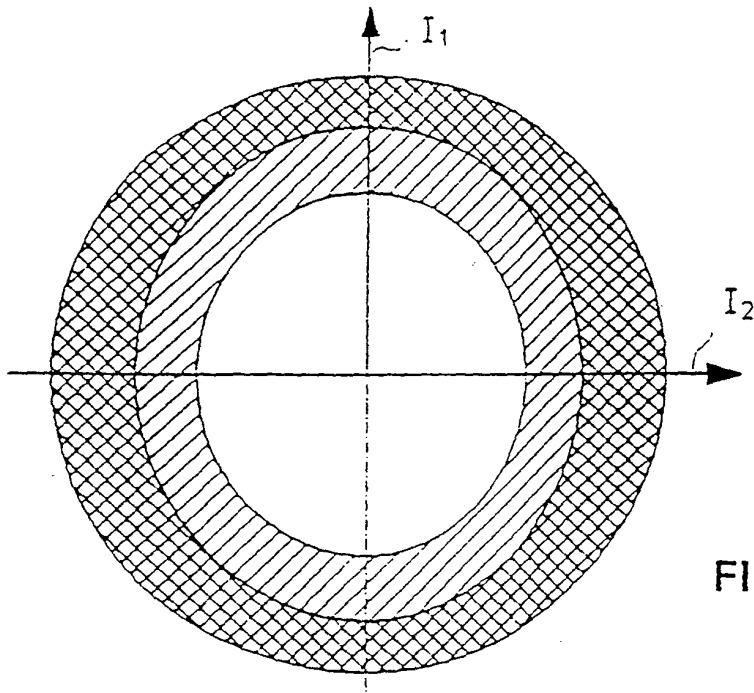


FIG. 1A

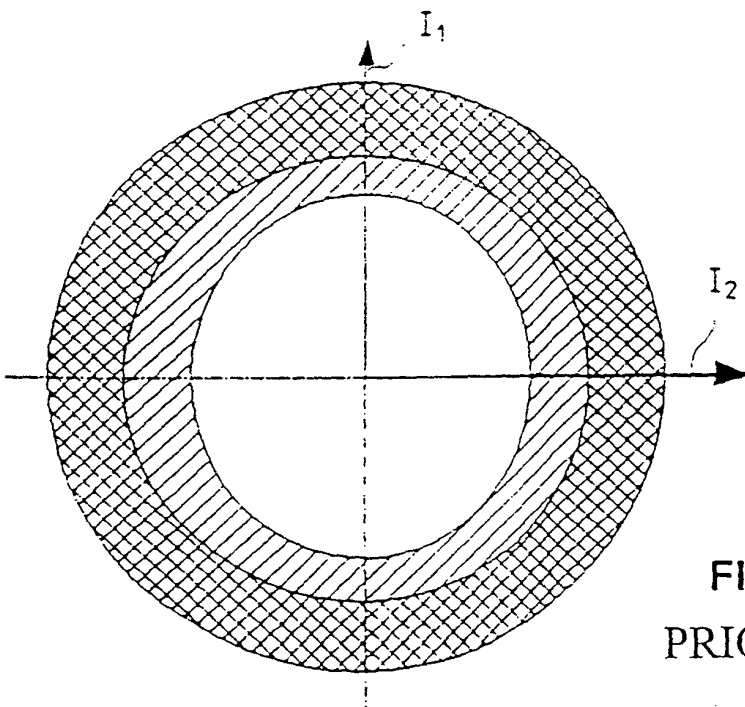


FIG. 1B
PRIOR ART

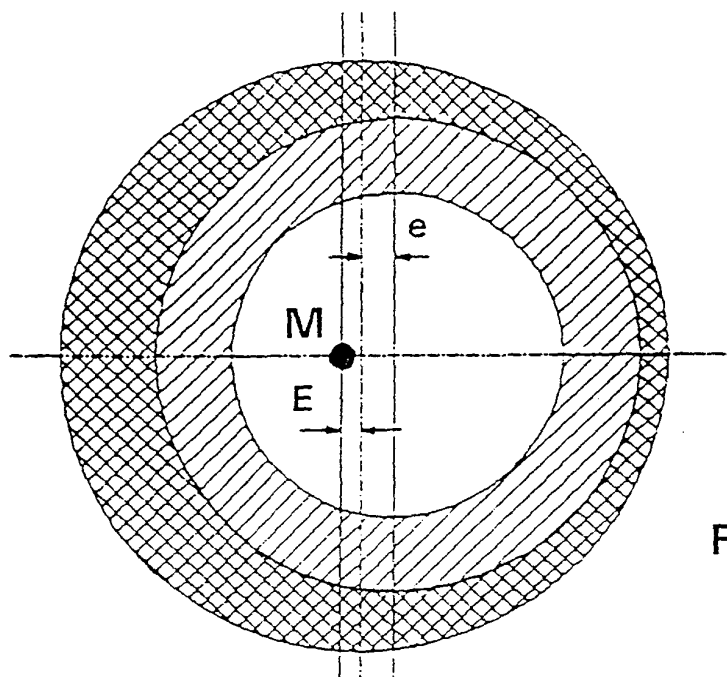


FIG. 2A

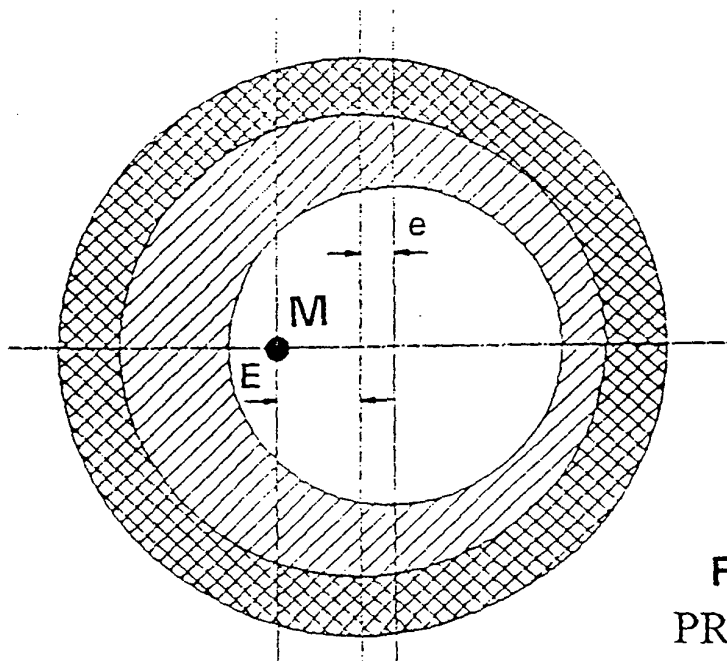
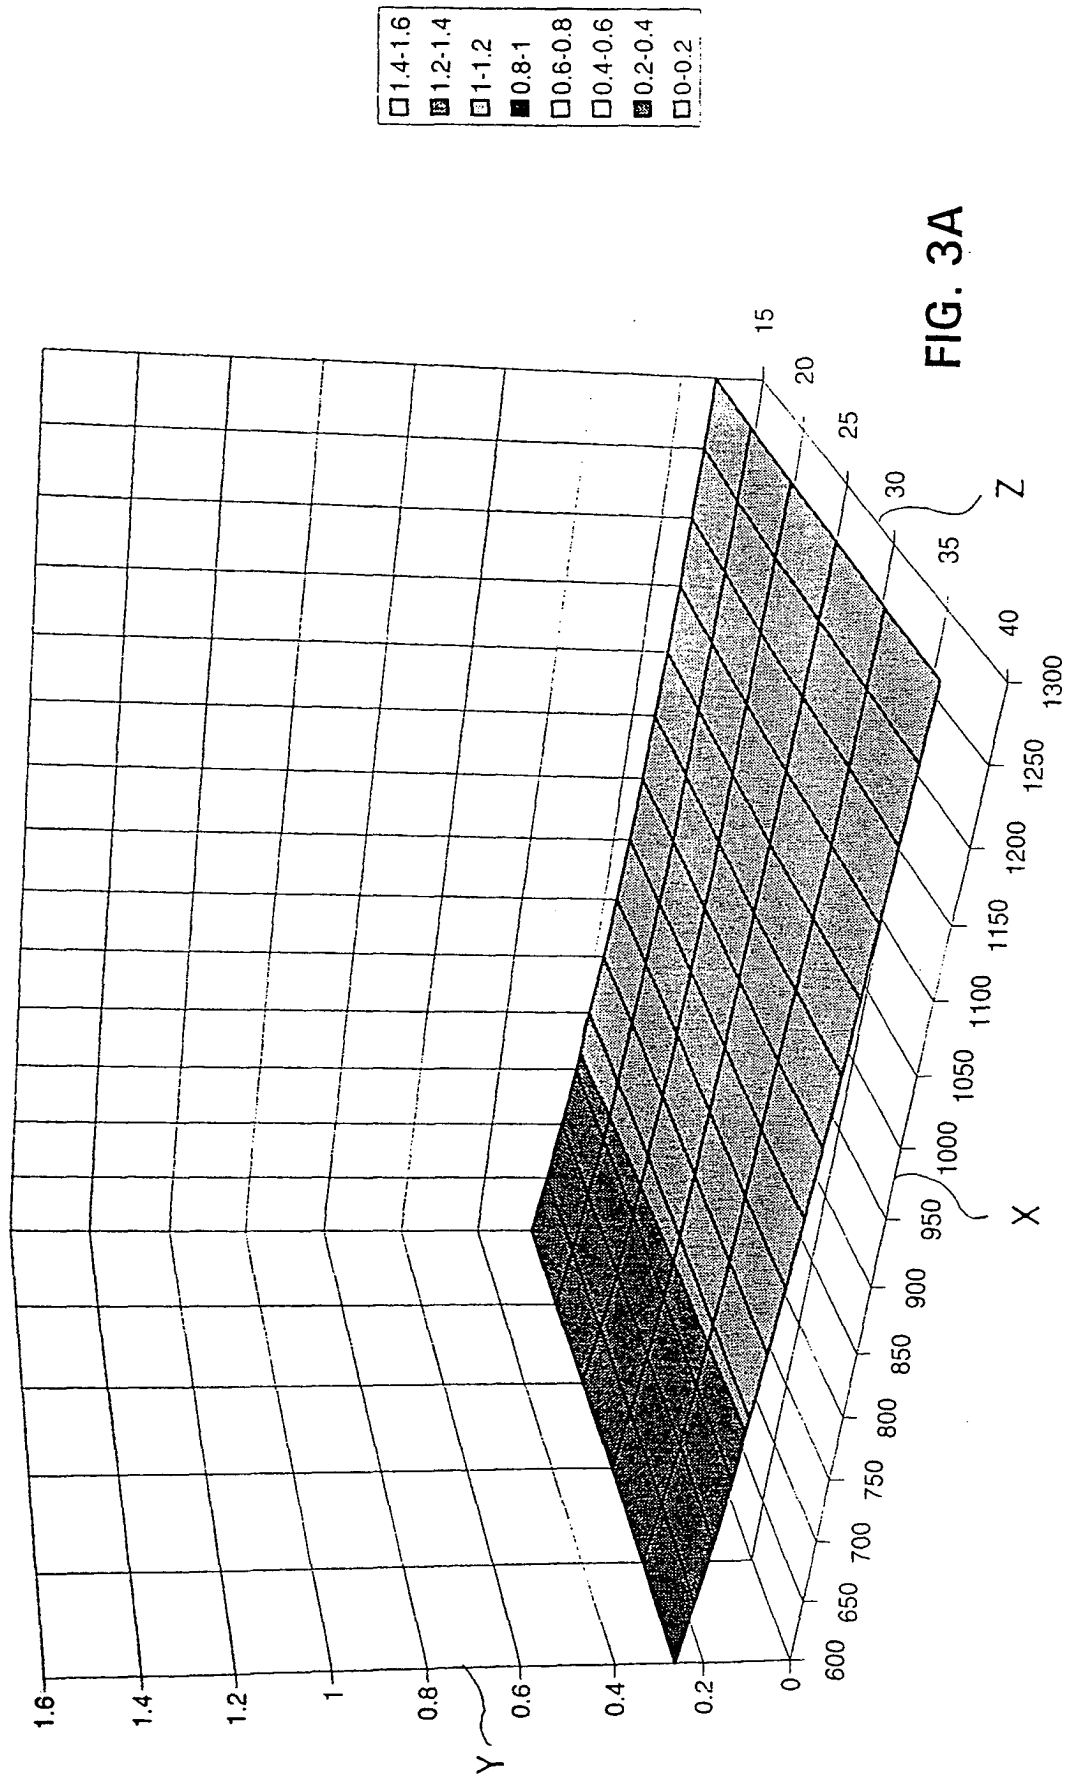


FIG. 2B
PRIOR ART



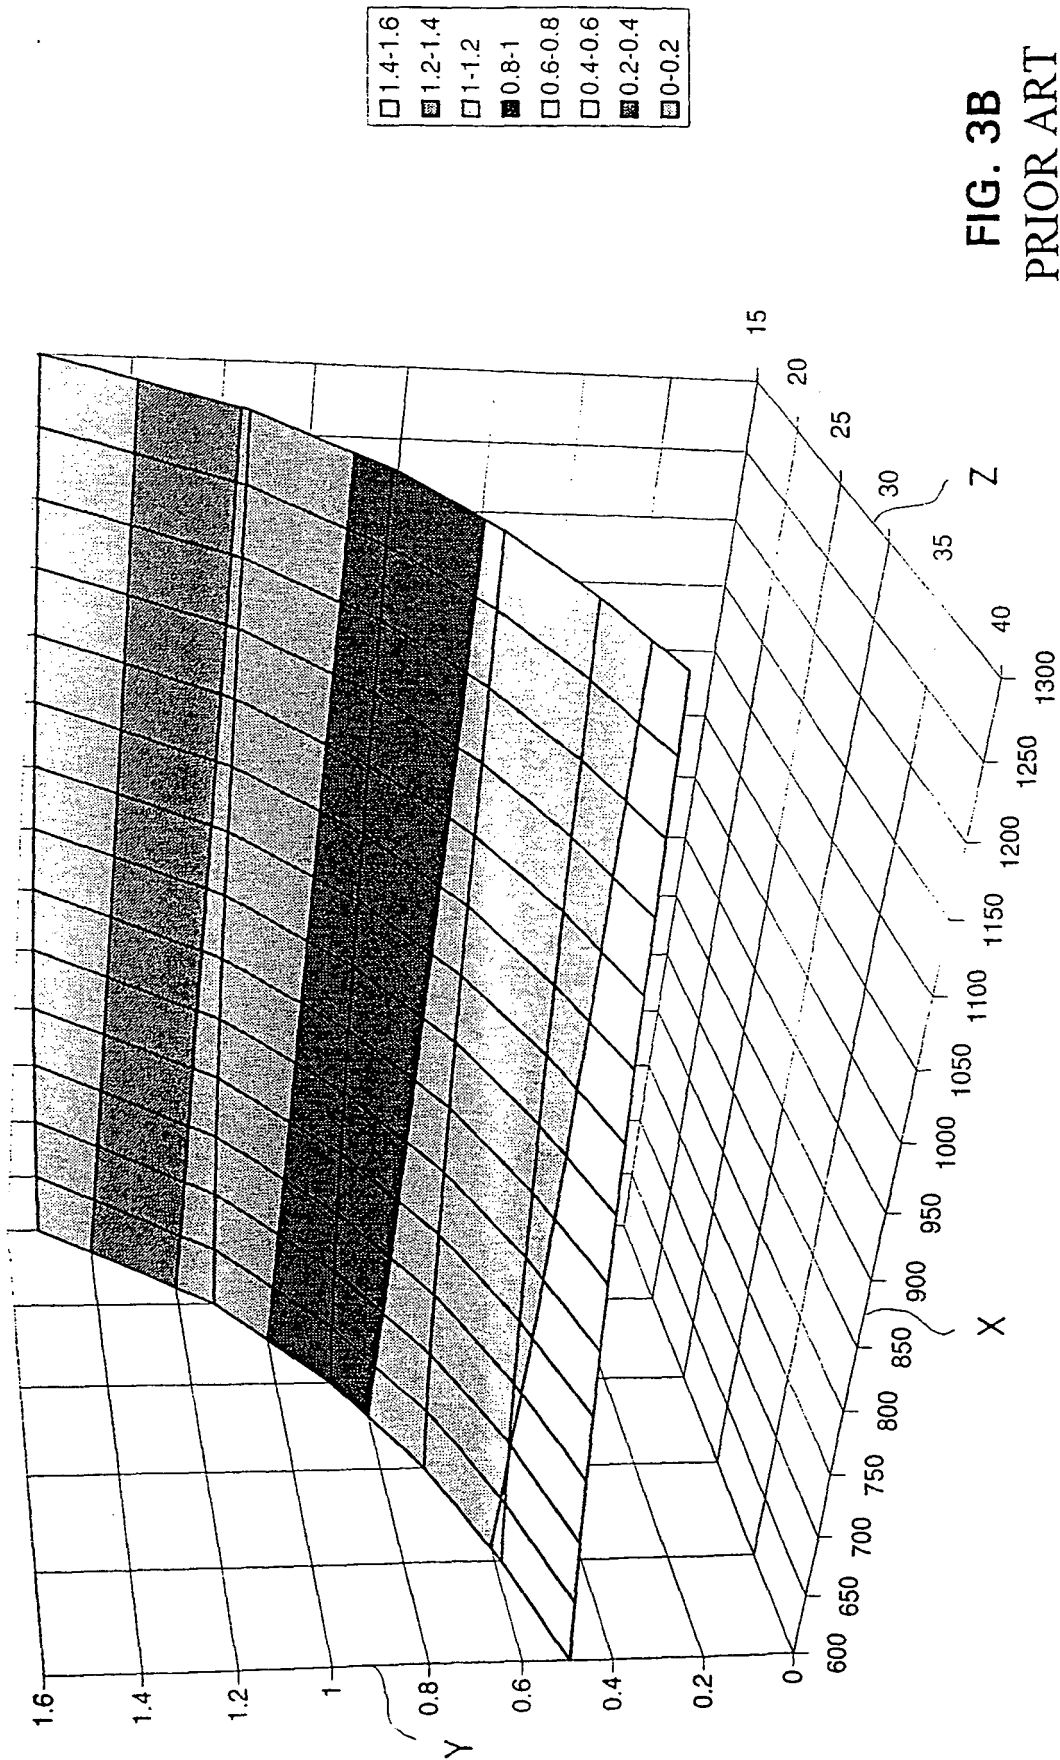


FIG. 3B
PRIOR ART

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00265

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: F16C 13/00, D21G 1/02, D21F 3/08 // G01M 1/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: F16C, D21G, D21F, G01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Patent Abstracts of Japan, Vol 9, No 290, M-430 abstract of JP 60-129417 A (TORAY K.K.), 10 July 1985 (10.07.85), details 1,3	1,3,5-8
Y	--	2,4
X	US 4368568 A (WATANABE), 18 January 1983 (18.01.83), details 1,3	1,3,5-8
Y	--	2,4
Y	WO 9533143 A1 (KUOSMANEN, PETRI, OLAVI ET AL), 7 December 1995 (07.12.95), figure 2	2,4

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 June 2000

Date of mailing of the international search report

11 -07- 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Jan-Axel Ylivainio / JA A

Telephone No. +46 8 782 25 00